
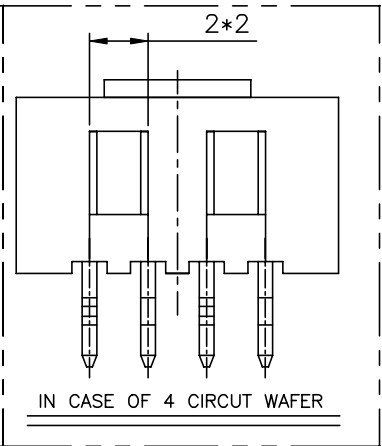


PCB LAOPUT T=1.6mm

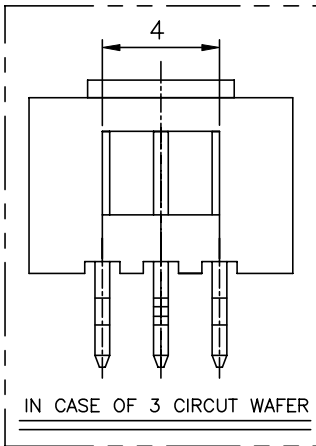

- NOTES:
- MATERIAL:
    - HOUSING: THERMOPLASTIC, HIGH TEMP(PA6T). UL94V-0; COLOR:NATURAL/BLACK
    - CONTACT: BRASS
  - FINISH:
    - N: 50u" MIN NICKEL OVERALL, 60u" MIN. MATT TIN PLATING(LEAD-FREE)
    - D: 50u" MIN NICKEL OVERALL, 30u" GOLD ON CONTACT FOR (LEAD FREE) 60u" MIN MATT TIN ON SOLDER AREA( LEAD FREE)
    - 1: 50u" MIN NICKEL OVERALL GOLD FLASH
  - REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
  - PACKING PLS. REFER TO PS-50426-XXXX-XX-TRP
  - SPEC. PLS. REFER TO PS-50426-XXXX-XXX
  - SET KINK ALTERNATELY TO ALL PIN
  - PART NUMBER 50426-XXX X X-XXX

XXX	Housing Color	Halogen Free	DIM D
001	NATURAL	HF	3.2
004	BLACK	HF	3.2
005	NATURAL	HF	3.5

- PACKING
- 7:TAPE&REEL WITH COVER
  - 8:TUBE WITH COVER
  - 0:TAPE & REEL
  - 1:TUBE

- PLATING
- N:MATT TIN
  - D:30u" GOLD ON CONTACT AREA
  - 60u" MIN MATT TIN ON SOLDER AREA
  - 1: GOLD FLASH

CKT	Dim A	Dim B	Dim C
003	4.0	7.64	9.0
004	6.0	9.64	11.0
005	8.0	11.64	13.0
006	10.0	13.64	15.0
007	12.0	15.64	17.0
008	14.0	17.64	19.0
009	16.0	19.64	21.0
010	18.0	21.64	23.0
011	20.0	23.64	25.0
012	22.0	25.64	27.0
013	24.0	27.64	29.0
014	26.0	29.64	31.0
015	28.0	31.64	33.0
016	30.0	33.64	35.0
017	32.0	35.64	37.0
018	34.0	37.64	39.0
019	36.0	39.64	41.0
020	38.0	41.64	42.0

<b>QUALITY SYMBOLS</b> MAJOR Ⓢ CRITICAL Ⓢ <b>GENERAL TOLERANCES</b> (UNLESS SPECIFIED) X ±0.5 .X ±0.25 .XX ±0.15 .XXX ±0.1 ANGLES ±2°	DRAWN BY Huang,ShunSen DATE 22/04/14	
	CHECKED BY Lu,Jing Quan DATE 22/04/14	
	APPROVED BY hsieh,fu yu DATE 22/04/14	SIZE <b>A4</b>
UNITS <b>mm</b>		RFG NO. <b>NA</b>
SCALE <b>4:1</b>	SHEET NO. <b>1 OF 1</b>	REV <b>F</b>
		DWG NO. <b>50426-XXXXX-XXX</b>